


Heavy Duty Disc Harrow Bearings are made with triple lip seals to protect from corrosive environments. This seal is a one piece shroud cover with three molded contact seals. This series is lubricated for life.

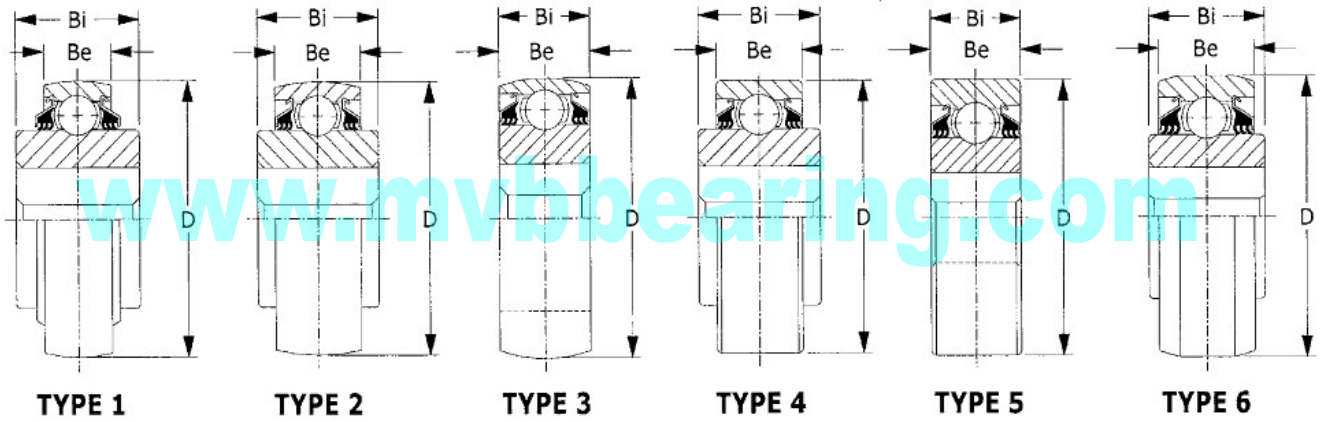

XMVB Bearing No.	TYPE	Shaft Size	Max d	A		R	D		Be nominal	Bi nominal	Be&Bi TOL+0/ to minus	Load Rating (lbf)		Weight lbs.
				nominal	Tol. +/-		nominal	TOL+0/to minus shown				Dynamic	Static	
W208PP5	4	1 1/8	1.2360	1.1800	0.0050	0.1000	3.1496	0.0005	0.7090	1.4380	0.0050	7340	3650	1.5
		28.575	31.394	29.970	0.127	2.54	80.000	0.013	18.000	36.520	0.127			
W208PPB5	1	1 1/8	1.2360	1.1800	0.0050	0.1000	3.1496	0.0005	0.7090	1.4380	0.0050	7340	3650	1.47
		28.575	31.394	29.970	0.127	2.540	80.000	0.013	18.000	36.520	0.127			
W208PP6	4	1.0000	1.0940	1.0300	0.005	0.1000	3.1496	0.0005	0.709	1.4380	0.005	7340	3650	1.62
		25.4	27.788	26.162	0.127	2.540	80.000	0.013	18.000	36.520	0.127			
W208PPB6	1	1.0000	1.0940	1.0300	0.0050	0.1000	3.1496	0.0005	0.7090	1.4380	0.0050	7340	3650	1.59
		25.400	27.788	26.162	0.127	2.540	80.000	0.013	18.000	36.520	0.127			
W208PP8	4	1 1/8	1.2360	1.1800	0.0050	0.1000	3.1496	0.0005	1.1880	1.4380	0.0050	7340	3650	1.66
		28.575	31.394	29.972	0.127	2.540	80.000	0.013	30.175	36.520	0.127			
W208PPB8	2	1 1/8	1.2360	1.1800	0.0050	0.1000	3.1496	0.0005	1.1880	1.4380	0.0050	7340	3650	1.66
		28.575	31.394	29.972	0.127	2.540	80.000	0.013	30.175	36.520	0.127			
W208PPB9	2	1.0000	1.0940	1.0300	0.0050	0.1000	3.1496	0.0005	1.1880	1.4380	0.0050	7340	3650	1.74
		25.400	27.788	26.162	0.127	2.540	80.000	0.013	30.175	36.520	0.127			
W208PPB11	6	7/8	0.9610	0.9050	0.0050	0.1000	3.3760	0.0005	1.1880	1.4380	0.0050	7340	3650	2.05
		22.225	24.441	23.000	0.127	2.540	85.750	0.013	30.175	36.520	0.127			
W208PPB12	6	1 1/8	1.2360	1.1800	0.0050	0.1000	3.3760	0.0010	1.1880	1.4380	0.0050	7340	3650	1.62
		28.575	31.394	29.972	0.127	2.540	85.750	0.025	30.175	36.520	0.127			
W208PPB13	1	7/8	0.9610	0.9050	0.0050	0.1000	3.1496	0.0005	0.7090	1.4380	0.0050	7340	3650	1.62
		22.225	24.441	23.000	0.127	2.540	80.000	0.013	18.000	36.520	0.127			
W209PPB5	2	1 1/4	1.3700	1.2900	0.0050	0.1000	3.3465	0.0005	1.1880	1.4380	0.0050	7350	4150	1.75
		31.750	34.798	32.766	0.127	25.400	85.000	0.013	30.175	36.520	0.127			
W209PPB7	6	1 1/4	1.3700	1.2900	0.0050	0.1000	3.3760	0.0005	1.1880	1.4375	0.0050	7350	4150	1.8
		31.750	34.798	32.766	0.127	2.540	85.750	0.013	30.175	36.510	0.127			
W210PP4	5	1 1/8	1.2360	1.1800	0.0050	0.1000	3.5433	0.0005	1.1880	1.1880	0.0050	7880	4650	1.92
		28.575	31.394	29.972	0.127	2.540	90.000	0.013	30.175	30.150	0.127			
W210PPB4	3	1 1/8	1.2360	1.1800	0.0050	0.1000	3.5433	0.0005	1.1880	1.1880	0.0050	7880	4650	2.11
		28.575	31.394	29.972	0.127	2.540	90.000	0.013	30.175	30.150	0.127			
W210PPB6	2	1 1/8	1.2360	1.1800	0.0050	0.1000	3.5433	0.0005	1.1880	1.4380	0.0050	7880	4650	2.11
		28.575	31.394	29.972	0.127	2.540	90.000	0.013	30.175	36.520	0.127			
W211PP3	5	1 1/2	1.6220	1.5311	0.0050	0.1000	3.9370	0.0006	1.3120	1.3120	0.0600	9740	5850	2.79
		38.100	41.199	38.890	0.127	2.540	100.000	0.013	33.324	33.324	0.152			
W211PPB3	3	1 1/2	1.6220	1.5311	0.0050	0.1000	3.9370	0.0006	1.3120	1.3120	0.0060	9740	5850	2.66
		38.100	41.199	38.890	0.127	2.540	100.000	0.015	33.324	33.324	0.152			
W211PP5	4	1 1/2	1.6220	1.5311	0.0050	0.1000	4.0000	0.0006	1.4380	1.7500	0.0060	9740	5850	3.38
		38.100	41.199	38.890	0.127	2.540	101.600	0.015	36.520	44.450	0.152			
W211PPB6	6	1 1/2	1.6220	1.5311	0.0050	0.1000	4.0770	0.0010	1.4380	1.7500	0.0060	9740	5850	4.05
		38.100	41.199	38.890	0.127	2.540	103.556	0.025	36.520	44.450	0.152			