


Inch Size Lock Nut 英制锁紧螺母

N000 Series



Thread Size

G=4.325"x12"/in~37.410"x3"/in

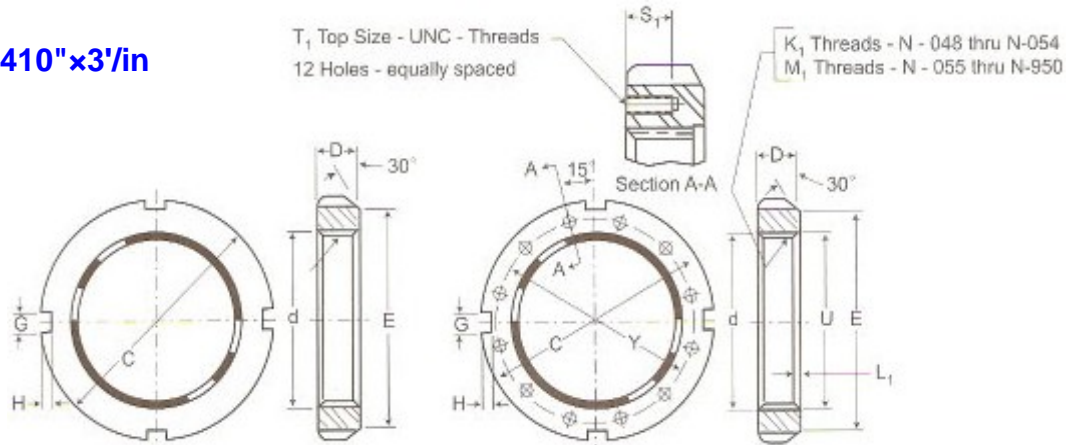

Inch Lock Nut No.	Threads			Face Dia. E max.	Nut Width D max.	Slot Width G max.	Counterbore of threads			Tapped Holes for Mounting Lock Plates		
	Major Dia. d nom.	No. per inch K1 M1	Outside Dia. C max.				Depth H max.	Dia. U min.	Depth L1 min.	B.C.Dia. Y min.	Tap size T1	Depth S1 min.
N022	4.325	12	5.318	4.901	0.791	0.485	0.198					
N024	4.716	12	5.693	5.313	0.823	0.485	0.198					
N026	5.106	12	6.130	5.703	0.885	0.485	0.198					
N028	5.497	12	6.505	6.109	0.948	0.485	0.198					
N030	5.888	12	7.130	6.688	0.979	0.610	0.229					
N032	6.284	8	7.505	7.094	1.041	0.610	0.229					
N034	6.659	8	7.880	7.484	1.073	0.610	0.229					
N036	7.066	8	8.255	7.875	1.104	0.610	0.229					
N038	7.472	8	8.693	8.255	1.135	0.610	0.229					
N040	7.847	8	9.443	8.750	1.198	0.735	0.323					
N044	8.628	8	10.255	9.531	1.260	0.860	0.385					
N048	9.442	6	11.443	10.625	1.354	0.860	0.385			10.423	5/16-18	0.625
N052	10.192	6	12.193	11.406	1.416	0.860	0.385			11.298	5/16-18	0.625
N056	11.004	6	13.005	12.219	1.510	0.980	0.385			12.110	5/16-18	0.625
N060	11.785	6	14.193	13.219	1.573	0.980	0.510			13.110	3/8-16	0.750
N064	12.562	6	15.005	14.031	1.666	0.980	0.510			13.860	3/8-16	0.750
N068	13.339	5	15.755	14.813	1.791	0.980	0.510	13.355	0.375	14.735	3/8-16	0.750
N072	14.17	5	16.505	15.500	1.791	1.230	0.510	14.186	0.375	15.485	3/8-16	0.750
N076	14.957	5	17.755	16.625	1.916	1.230	0.604	14.973	0.375	16.485	1/2-13	0.875
N080	15.745	5	18.505	17.438	2.073	1.230	0.604	15.761	0.375	17.235	1/2-13	0.875
N084	16.532	5	19.318	18.188	2.073	1.355	0.604	16.548	0.375	18.110	1/2-13	0.875
N088	17.319	5	20.505	19.250	2.385	1.355	0.604	17.335	0.375	19.110	5/8-11	1.250
N092	18.107	5	21.255	20.688	2.385	1.355	0.604	18.123	0.375	19.985	5/8-11	1.250
N096	18.894	5	22.068	20.750	2.385	1.480	0.604	18.910	0.375	20.673	5/8-11	1.250
N500	19.682	5	22.818	21.688	2.703	1.480	0.604	19.698	0.375	21.610	5/8-11	1.250
N530	20.867	4	24.818	23.250	2.703	1.605	0.823	20.887	0.500	23.360	5/8-11	1.250
N560	22.048	4	25.568	24.000	2.953	1.605	0.823	22.068	0.500	24.110	5/8-11	1.250
N600	23.623	4	27.568	26.000	2.953	1.605	0.823	23.643	0.500	25.923	5/8-11	1.250
N630	24.804	4	28.755	27.125	2.953	1.855	0.823	24.824	0.500	27.235	5/8-11	1.250
N670	26.379	4	30.693	29.125	3.140	1.855	0.823	26.399	0.500	28.985	5/8-11	1.250
N710	27.961	3	32.693	30.688	3.578	1.980	1.010	27.988	0.688	30.610	5/8-11	1.250
N750	29.536	3	34.255	32.313	3.578	2.230	1.010	29.563	0.688	32.235	5/8-11	1.250
N800	31.504	3	36.255	34.250	3.578	2.230	1.010	31.531	0.688	34.610	5/8-11	1.250
N850	33.473	3	38.568	36.375	3.578	2.480	1.010	33.500	0.688	36.485	3/4-10	1.500
N900	35.441	3	40.568	38.375	3.953	2.480	1.010	35.468	0.688	38.610	3/4-10	1.500
N950	37.410	3	43.005	40.500	3.953	2.480	1.010	37.437	0.688	40.610	3/4-10	1.500