


Linear Motion Bearings-Linear Ball Busings 直线轴承



LM..LUU Series

Resin Retainer This type is a metric dimension series generally used in Asia and other countries.

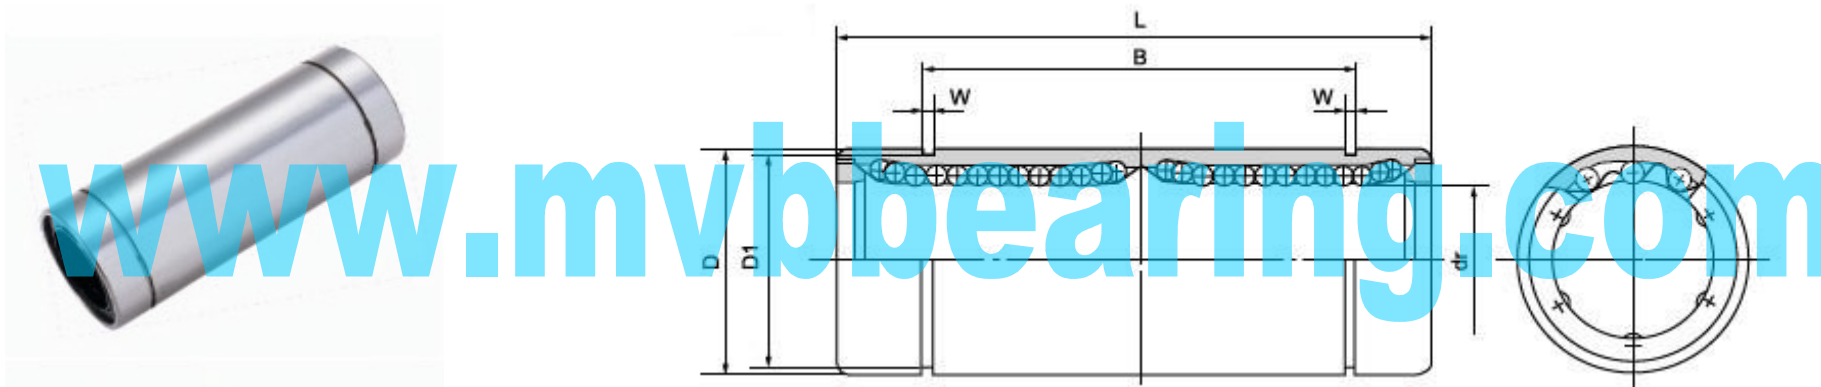

www.mvbbearing.com

标准型 Standard Type LM...L	密封型 Sealed Type LM..LUU	钢球列数 Ball circuit	重量 Weight (g)	公称轴径 Nominal shaft dia. mm	dr		主要尺寸和公差 Major dimensions and tolerance(T)								偏心 Eccentricity μ m	最大 径向间隙 Radial Clearance (max) μ m	额定负荷 Basic load rating		
					公差Tolerance μ m		D		L		B		W	D1			动负荷 Dynamic C N	静负荷 Static Co N	
					精密 Precision	普通 High	mm	公差 Tol. μ m	mm	公差 Tol. μ m	mm	公差 Tol. μ m	mm	mm					
LM3L	LM3LUU	4	3	3			7		19			-	-	-	-	10	-2	139	216
LM4L	LM4LUU	4	4	4			8		23			-	-	-	-	10	-3	139	254
LM5L	LM5LUU	4	8	5			10	0 -13	29			20		1.1	9.6	10	-3	263	412
LM6L	LM6LUU	4	16	6			12		35			27		1.1	11.5	10	-3	324	529
LM8L	LM8LUU	4	31	8			15		45			35		1.1	14.3	15	-5	431	784
LM10L	LM10LUU	4	62	10			19		55			44	0 -300	1.3	18	15	-5	588	1100
LM12L	LM12LUU	4	80	12			21	0 -16	57			46	0 -300	1.3	20	15	-5	657	1200
LM13L	LM13LUU	4	90	13			23		61			46		1.3	22	15	-7	814	1570
LM16L	LM16LUU	4	145	16			28		70			53		1.6	27	15	-7	1230	2350
LM20L	LM20LUU	4	180	20			32	0 -9	80			61		1.6	30.5	20	-9	1400	2750
LM25L	LM25LUU	4	440	25			40	0 -12	112			82		1.85	38	20	-9	1560	3140
LM30L	LM30LUU	4	580	30			45		123			89		1.85	43	20	-9	2490	5490
LM35L	LM35LUU	5	795	35			52		135			99		2.1	49	20	-9	2650	6,270
LM40L	LM40LUU	5	1171	40			60	0 -15	154			121	0 -400	2.1	57	25	-13	3430	8,040
LM50L	LM50LUU	6	3100	50			80	0 -10	192			148		2.6	76.5	25	-13	6080	15,900
LM60L	LM60LUU	6	3500	60			90	0 -20	211			170		3.15	86.5	25	-16	7,650	20,000

MVB Power-Star Bearing Industry Co., Ltd. Tel: +86-592-523 0986 Fax: +86-592-376 1975

Url: www.mvbbearing.com Email: vivy@mvbbearing.com ; mvbbearing@gmail.com