




Flanged Linear Motion Bearings-Linear Ball Busings 法兰式直线轴承 LMHM..UU Series

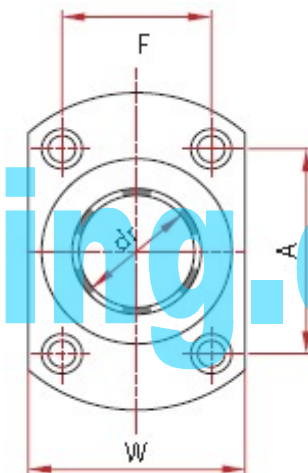

Resin Retainer This type is a metric dimension series generally used in Asia and other countries.

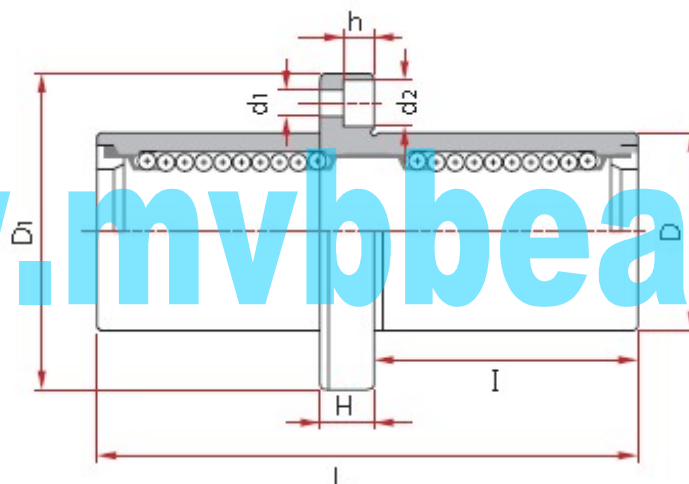

LMHM16 ~ LMHM40

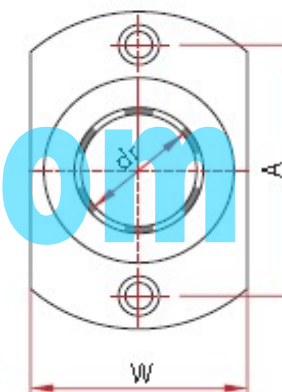

LMHM6 ~ LMHM13

标准型 Standard Type LMHM...	密封型 Sealed Type LMHM..UU	重量 Weight (g)	公称轴径 Nominal shaft dia. mm	dr	主要尺寸和公差 Major dimensions and tolerance(T)													偏心 Eccentricity	垂直度 Squareness	额定负荷 Basic load rating	
					D		L		I	D ₁	W	H	A	F	d ₁	d ₂	h			Dynamic C N	Static Co N
					公差 Tolerance	公差 Tol.	公差 Tol.	公差 Tol.													
					mm	μm	mm	μm	mm	mm	mm	mm	mm	mm	mm	mm	mm			mm	mm
LMHM6	LMHM6UU	28	6	0 -10	12	0	35	±300	15	28	18	5	20	-	3.5	6	3.1	15	15	323	529
LMHM8	LMHM8UU	47	8		15	-13	45		20	32	21	5	24	-	3.5	6	3.1			431	784
LMHM10	LMHM10UU	90	10		19	0 -16	55	0 -300	25	40	25	6	29	-	4.5	7.5	4.1			588	1,100
LMHM12	LMHM12UU	102	12		21		26		42	27	6	32	-	4.5	7.5	4.1	813			1,570	
LMHM13	LMHM13UU	123	13	23	28		43		29	6	33	-	4.5	7.5	4.1	813	1,570				
LMHM16	LMHM16UU	182	16	28	32	48	34		6	31	22	4.5	7.5	4.1	1,230	2,350					
LMHM20	LMHM20UU	247	20	0 -12	32	0 -19	80	0 -400	36	54	38	8	36	24	5.5	9	5.1	20	20	1,400	2,740
LMHM25	LMHM25UU	525	25		40		52		62	46	8	40	32	5.5	9	5.1	1,560			3,140	
LMHM30	LMHM30UU	645	30		45		57		74	51	10	49	35	6.6	11	6.1	2,490			5,490	