


# Flanged Linear Motion Bearings-Linear Ball Busings 法兰式直线轴承 LMKP..UU Series



Resin Retainer This type is a metric dimension series generally used in Asia and other countries.

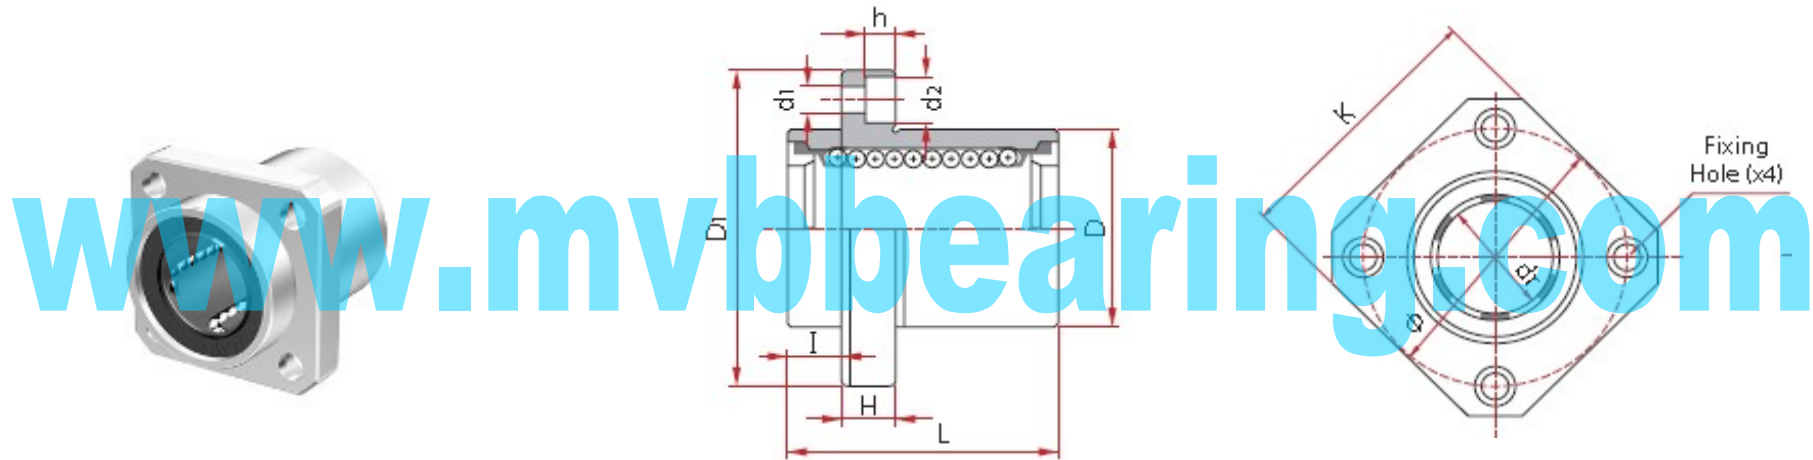

标准型 Standard Type LMKP...	密封型 Sealed Type LMKP..UU	重量 Weight (g)	公称轴径 Nominal shaft dia. mm	dr 公差 Tolerance $\mu\text{m}$	主要尺寸和公差 Major dimensions and tolerance(T)											偏心 Eccentricity $\mu\text{m}$	垂直度 Squareness $\mu\text{m}$	额定负荷 Basic load rating			
					D		L		D <sub>1</sub>	I	H	K	$\Phi$	d <sub>1</sub>	d <sub>2</sub>			h	Dynamic C N	Static Co N	
					mm	公差 Tol. $\mu\text{m}$	mm	公差 Tol. $\mu\text{m}$	mm	mm	mm	mm	mm	mm	mm			mm			
LMKP6	LMKP6UU	24	6	0 -9	12	0	19	±300	28	5	5	22	20	3.5	6	3.1	12	12	206	265	
LMKP8	LMKP8UU	37	8		15	-13	24		32	5	5	25	54	3.5	6	3.1			274	392	
LMKP10	LMKP10UU	72	10		19	0 -13	29		0 -200	40	6	6	30	29	4.5	7.5			4.1	372	549
LMKP12	LMKP12UU	76	12		21		30			42	6	6	32	32	4.5	7.5			4.1	510	784
LMKP13	LMKP13UU	88	13	23	0 -16	32	0 -300	43	6	6	34	33	4.5	7.5	4.1	510	784				
LMKP16	LMKP16UU	120	16	28		37		48	6	6	37	38	4.5	7.5	4.1	774	1180				
LMKP20	LMKP20UU	180	20	32	0 -12	42	0 -300	54	8	8	42	43	5.5	9	5.1	15	15	882	1370		
LMKP25	LMKP25UU	340	25	40		59		62	8	8	50	51	5.5	9	5.1			980	1570		
LMKP30	LMKP30UU	470	30	45	0 -19	64	0 -300	74	10	10	58	60	6.6	11	6.1	20	20	1570	2740		
LMKP35	LMKP35UU	650	35	52		70		82	10	10	64	67	6.6	11	6.1			1670	3140		
LMKP40	LMKP40UU	1,060	40	60	0 -22	80	0 -300	96	13	13	75	78	9	14	8.1	25	25	2160	4020		
LMKP50	LMKP50UU	2,200	50	80		100		116	13	13	92	98	9	14	8.1			3820	7940		
LMKP60	LMKP60UU	3,000	60	90		110		134	18	18	106	112	11	17	11			4700	10000		